



TXGN-TB-300 Product Data Sheet

4G/LTE Copper Rod Sucker Antenna
SMA-J Interface

I. Product Introduction



TXGN-TB-300 is a 4G/LTE copper rod sucker antenna. Height of the antenna is 160mm. With a SMA-J interface, it can be applied to such devices with frequency of 4G/LTE as wireless module, data transfer radio, vehicle and so on.

II. Specification and Parameters

Physical Parameters	
Bandwidth	4G/LTE
Gain	6dBi
SWR	≤1.5
Polarization	Linear
Radiation Direction	Omnidirectional
Input Impedance	50 Ω
Power Capacity	50W
Other Parameters	
Height	160mm
Sucker Diameter	60mm
Total Weight	312g
Feeder Length	3m
Material	Copper
Interface	SMA-J
Working Temperature	-40℃ ~ +85℃
Storage Temperature	-40℃ ~ +85℃



III. Testing

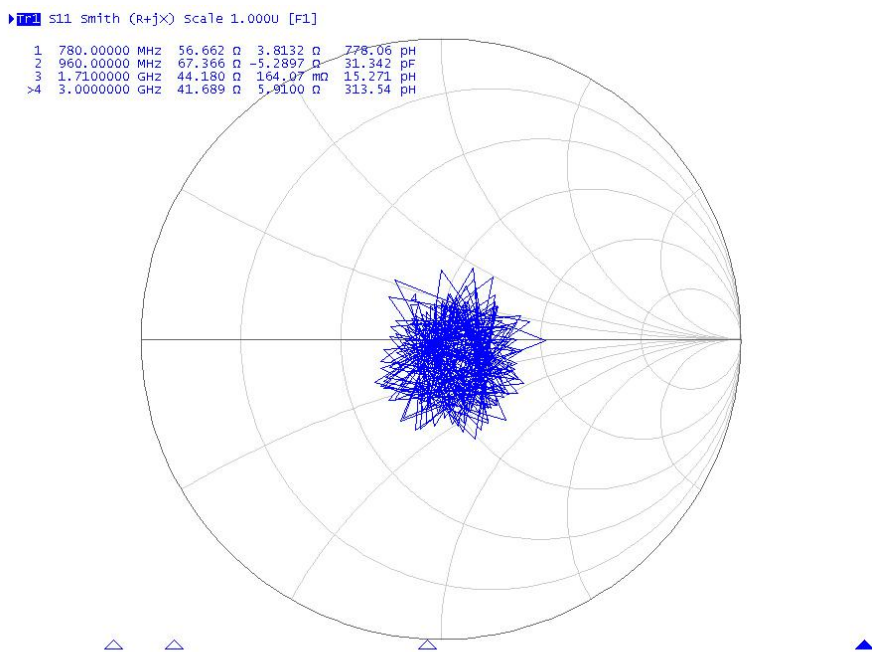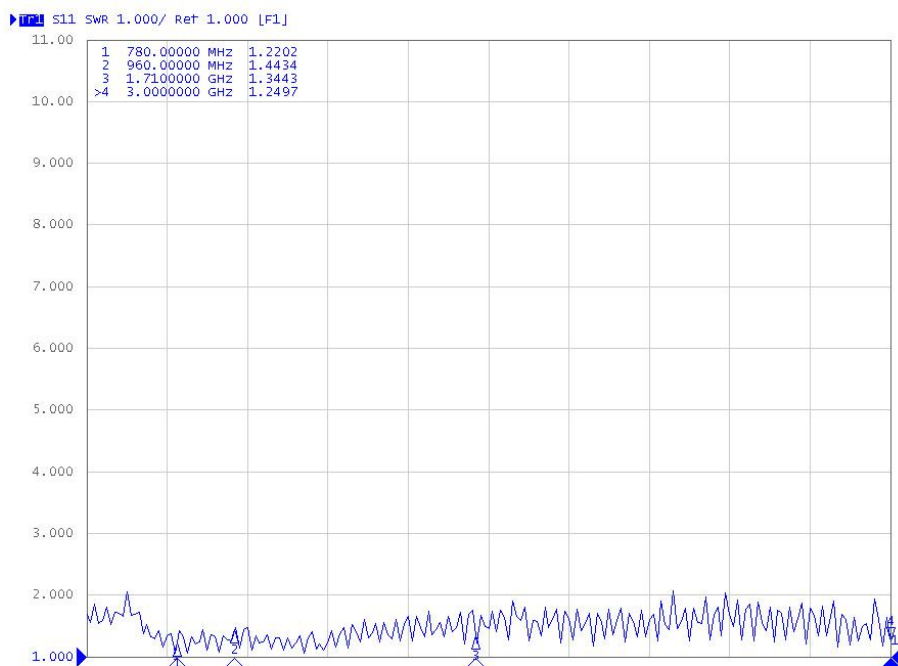

IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.ebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

Fax: 028-64146160 ext. 821

Web: www.ebyte.com

Address: Innovation Center D347, 4# XI-XIN Road, Chengdu, Sichuan, China

